


PARTIAL ROOF PLAN

SCALE: $\frac{1}{8}'' = 1'-0''$

NOTE: ALL DIMENSIONS ± FIELD VERIFY AND ACCOMMODATE ACTUAL FIELD CONDITIONS

KEYED CONSTRUCTION NOTES

- (R1) NEW TWO-PIECE FASCIA (TO MATCH EXISTING) FULL PERIMETER OF OPEN ROOF EDGE AT REROOF AREA(S).
- (R2) PROVIDE 12" X 24" MEMBRANE EQUIPMENT PAD WELDED TO MEMBRANE AT EACH GAS LINE SUPPORT.

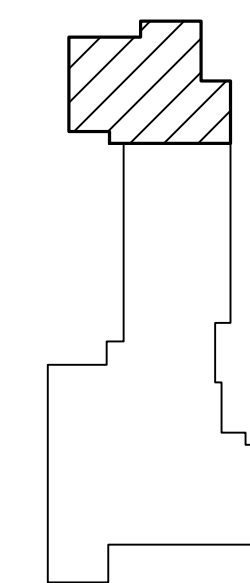

KEY PLAN

| DESCRIPTION OF WORK | ROOF CORE DESCRIPTIONS |
|---|---|
| REROOF AREA A - APPROX. 5,023 s.f.: 1. REMOVE EX'G. ROOF EDGE METAL, FLASHINGS AND COUNTER FLASHINGS; 2. SALVAGE AND REMOVE EX'G. ROOF DRAIN STRAINERS; 3. REMOVE EX'G. PVC MEMBRANE; 4. INSTALL NEW MECH. FASTENED ROOFING MEMBRANE; 5. REINSTALL EX'G. ROOF DRAIN STRAINERS; 6. INSTALL NEW EDGE METAL AND FLASHINGS AS INDICATED. | CORE A1 (DRY): 1. PVC MEMBRANE - MECH. ATTACHED; 2. 1 1/2" TAPERED POLYISOCYANURATE INSULATION (HIGH POINT); 3. METAL DECK. |
| | CORE A2 (DRY): 1. PVC MEMBRANE - MECH. ATTACHED; 2. 5" TAPERED POLYISOCYANURATE INSULATION (3 FEET FROM DRAIN); 3. METAL DECK. |
| | CORE A3 (DRY): 1. PVC MEMBRANE - MECH. ATTACHED; 2. 6 1/2" TAPERED POLYISOCYANURATE INSULATION (HIGH POINT); 3. METAL DECK. |
| | CORE A4 (DRY): 1. PVC MEMBRANE - MECH. ATTACHED; 2. 5" TAPERED POLYISOCYANURATE INSULATION (3 FEET FROM DRAIN); 3. METAL DECK. |
| REROOF AREA B - APPROX. 2,305 s.f.: 1. REMOVE EX'G. ROOF EDGE METAL, FLASHINGS AND COUNTER FLASHINGS; 2. SALVAGE AND REMOVE EX'G. ROOF DRAIN STRAINERS; 3. REMOVE EX'G. PVC MEMBRANE; 4. INSTALL SLIP SHEET OVER EX'G. EPS INSULATION; 5. INSTALL NEW MECH. FASTENED ROOFING MEMBRANE; 6. REINSTALL EX'G. ROOF DRAIN STRAINERS; 7. INSTALL NEW EDGE METAL AND FLASHINGS AS INDICATED. | CORE B1 (DRY): 1. TPO MEMBRANE - MECH. ATTACHED; 2. 1 1/2" EPS INSULATION; 3. (2) LAYERS 1 1/2" POLYISOCYANURATE INSULATION; 4. METAL DECK - SLOPED. |
| | CORE B2 (DRY): 1. TPO MEMBRANE - MECH. ATTACHED; 2. 1 1/2" EPS INSULATION; 3. (2) LAYERS 1 1/2" POLYISOCYANURATE INSULATION; 4. METAL DECK - SLOPED. |

ANTHONY P. ESSON ARCHITECT
 GAYLORD, MICHIGAN 49734
 PO BOX 479
 (689) 732-0585
 TELEPHONE:

DRAWING TITLE
PARTIAL ROOF PLAN /
DESCRIPTION OF WORK

PROJECT TITLE
 CENTRAL LAKE PUBLIC SCHOOLS - PROJECT SF1.4
ELEMENTARY SCHOOL PARTIAL REROOFING
 821 S DAVIS ST., CENTRAL LAKE, MI 49822

PROJECT NO.
 267-18D

DATE

SHEET
1/1